


OAKMONT VILLAGE ASSOCIATION
ARCHITECTURAL COMMITTEE

GOLF SCREEN

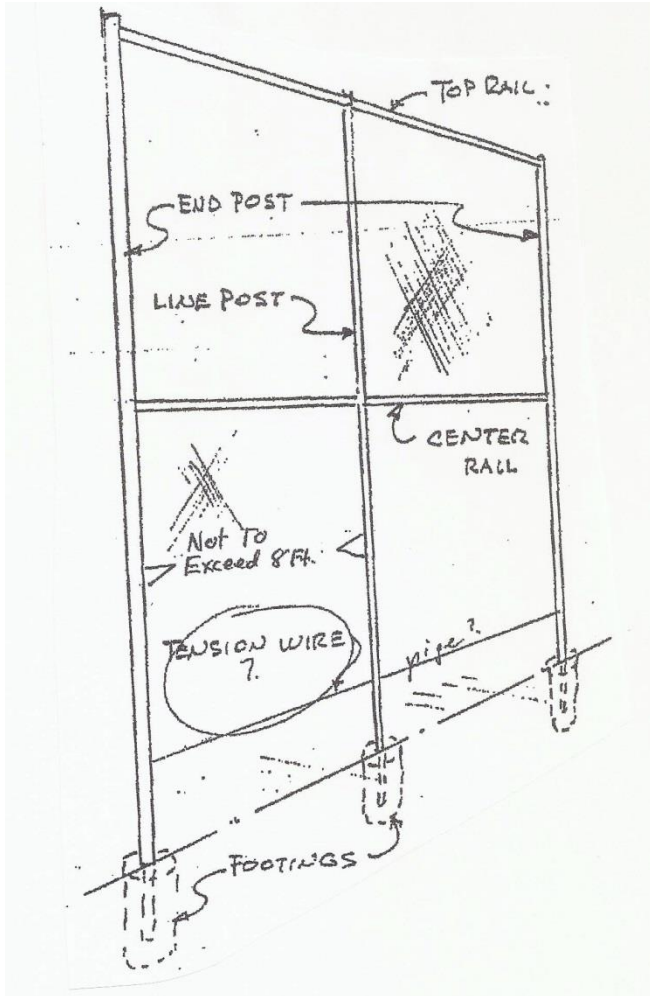

Each application for a golf screen shall comply with all of the following:

The application shall include plan and elevation of the screen and its relation to the house and the golf course, and shall show the location and type of trees and shrubs to be planted to soften the screen's impact.

Construction and maintenance of the screen shall be the responsibility of the homeowner.

Minimum construction standards should be increased as required for larger screens.

MINIMUM CONSTRUCTION STANDARDS

1. End posts shall be 1-7/8" OD; line, top and center posts shall be 1-3/8" OD; all painted flat black, with posts set in 24" deep X 8" dia. concrete footings.
2. Bottom tension wire shall be 9 gauge, set 18" to 24" above ground level to facilitate landscape maintenance.
3. Screening shall be 1" mesh, Cissel Polynet, or approved equal, attached to posts and rails with vinyl coated clips.

CITY PERMIT REQUIRED